

Type 5108A

5108A PIEZOTRON® LOW IMPEDANCE COUPLER

The Model 5108A coupler is a small, easy-to-operate instrument for use with low impedance Piezotron sensors with built-in electronics. The primary function of this passive coupler is to serve as an inter-connecting device, simultaneously providing conditioned power to the low impedance sensor and a measured signal to recording equipment.

Power is derived externally from a battery or inexpensive, unregulated line powered supply. Internal protection is provided to prevent

damage resulting from an improperly connected (reverse polarity) power source.

The 5108A is AC coupled, thereby eliminating the sensor's bias voltage from the measured signal. Its small size and compact shape allows easy, direct attachment to the input connector of an oscilloscope. This unit is CE compliant.

- Simple to operate
- AC coupled
- Reverse polarity protection
- Conforming to CE



Technical Data	Unit	5108A
Input Characteristics		
Sensor Current Supply	mA	4
Sensor Signal Voltage	V _{pp}	20
Transfer Characteristics		
Gain		1
Frequency Response min. (-3dB with 1 meg load)	Hz	0.02 to ⁽¹⁾
Output Characteristics		
Coupling Capacitor	μF	47
Full Scale Signal	V _{pp}	20
Current max.		see note 2
Environmental		
Temperature Range Operating	°F	32...122
	°C	0...50
Storage	°F	-40...185
	°C	-40...85
Vibration 5 to 2000Hz	<i>g</i>	±10
Shock 1ms duration	<i>g</i> _{pk}	100
Power		
Supply Voltage	VDC	22...30
Physical		
Size including conn. (L x H x W)	in	2.25 x 0.87 x 0.87
	mm	57,2 x 22,2 x 22,2
Weight	g	65
Connectors		
Input	type	BNC neg.
Output	type	BNC pos.
Power	type	banana jacks polarity (+red, -black)

1. See formula on reverse side

2. 1 mA less than supplied by coupling

1 *g* = 9.80665 m/s², 1 inch = 25.4 mm, 1 gram = 0.03527 oz

Kistler Instrument Corporation reserves the right to discontinue or change specifications, designs or materials without notice consistent with sound engineering principles and quality practices.

Kistler Instrument Corporation, 75 John Glenn Drive, Amherst NY 14228
Phone 716-691-5100, Fax 716-691-5226, e-mail: kicsales@kistler.com, www.kistler.com

Referring to Frequency Response specification on page 1.


$$f_{\max} = [0.32 (\text{bias current} - 1\text{mA})] / [(C_c + 0.002 + C_{in}) (V_o)] \text{ where:}$$

- f_{\max} = maximum undistorted sine wave frequency, in kHz,
above which slew rate limiting distorts amplitude and waveform
- bias current = operating current supplied by coupler, for the 5108A, bias current = 4mA
- C_c = cable capacitance in μF , typically 30 pF/ft (100 pF/m)
- C_{in} = Input capacitance of oscilloscope or recording instrument,
typically 20 pF for an oscilloscope
- V_o = signal amplitude, in V_{pp}

With a 5 V_{pp} signal and a 20 pF instrument, and 100 ft (30 m) of cable, $f_{\max} = 38$ kHz.

With a 5 V_{pp} signal and a 20 pF instrument, and 6 ft (2 m) of cable, $f_{\max} = 87$ kHz.

Ordering Information

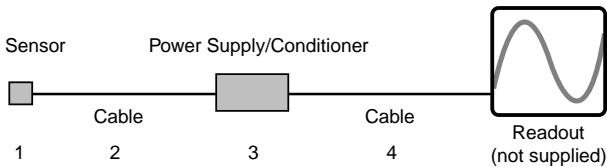

Specify:

- 1 - sensor specify
- 2 - 1761B... cable, 10-32 pos. to BNC pos., specify length
- 3 - 5108A coupler
- 4 - 1603B... output extension cable, BNC neg. to BNC pos., specify length in meters